



# India's Safest Wire\*

**PRICE LIST**

17-08-2026



# Innovative Products For Your Safety



# India's Safest Wire\*



**Electron Beam  
Crosslinking Technology**

**No Short Circuit**



**Zero Halogen Flame  
Retardant**

**60+ Years of Long Life**



**More than 80% extra  
Current Carrying Capacity**

**Rated Temperature 150°C**



**Green Wire & Eco-Friendly  
With ESG Support**

**Energy Saving  
Upto 25%**




# ULTRA SAFE 150 eB-HFFR

Single Core Unsheathed Multistrand High Conductivity Annealed Bare Copper Conductor,  
Electron Beam Cross Linked HFFR Insulated Cable. 1100 volts, As Per IS-17048 : 2018 (Class : 5 Conductor)

| Nominal area of conductor sq mm | Basic Code           | Price ₹/90 mtrs. | Pkg. | Price ₹/200 mtrs. | Pkg. | Price ₹/mtrs. |
|---------------------------------|----------------------|------------------|------|-------------------|------|---------------|
| 0.75 sq mm                      | EBFT075MX (90, 200M) | ₹ 3,190          | 20N  | ₹ 7,089           | 10N  | ₹ 35.44       |
| 1.00 sq mm                      | EBFT100MX (90, 200M) | ₹ 3,925          | 20N  | ₹ 8,722           | 10N  | ₹ 43.61       |
| 1.50 sq mm                      | EBFT150MX (90, 200M) | ₹ 6,005          | 16N  | ₹ 13,344          | 8N   | ₹ 66.72       |
| 2.50 sq mm                      | EBFT250MX (90, 200M) | ₹ 9,645          | 12N  | ₹ 21,433          | 6N   | ₹ 107.17      |
| 4.00 sq mm                      | EBFT400MX (90, 200M) | ₹ 14,285         | 8N   | ₹ 31,744          | 4N   | ₹ 158.72      |
| 6.00 sq mm                      | EBFT600MX (90, 200M) | ₹ 21,460         | 6N   | ₹ 47,689          | 3N   | ₹ 238.44      |
| 10 sq mm                        | EBFT1000MX (100 M)   | ₹ 35,750         | 5N   | —                 | —    | ₹ 357.50      |
| 16 sq mm                        | EBFT1600MX (100M)    | ₹ 57,215         | 3N   | —                 | —    | ₹ 572.15      |

Single Core Unsheathed Multistrand High Conductivity Annealed Bare Copper Conductor,  
Electron Beam Cross Linked HFFR Insulated Cable. 1100 volts, As Per IS-17048 : 2018 (Class : 2 Conductor)

| Nominal area of conductor sq mm | Basic Code           | Price ₹/90 mtrs. | Pkg. | Price ₹/200 mtrs. | Pkg. | Price ₹/mtrs. |
|---------------------------------|----------------------|------------------|------|-------------------|------|---------------|
| 1.00 sq mm                      | EBFT100MX (90, 200M) | ₹ 4,435          | 20N  | ₹ 9,856           | 10N  | ₹ 49.28       |
| 1.50 sq mm                      | EBFT150MX (90, 200M) | ₹ 6,600          | 16N  | ₹ 14,667          | 8N   | ₹ 73.33       |
| 2.50 sq mm                      | EBFT250MX (90, 200M) | ₹ 10,375         | 12N  | ₹ 23,056          | 6N   | ₹ 115.28      |

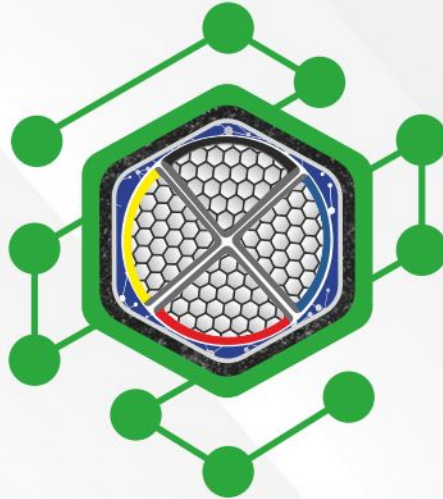

## ***eB<sup>+</sup>POWER Cable***

40+ Years of Long Life



More than 30% extra  
Current Carrying Capacity


Anti-Crack Resistance  
Insulation



Rated Temperature 125°C

Green Wire & Eco-Friendly  
With ESG Support



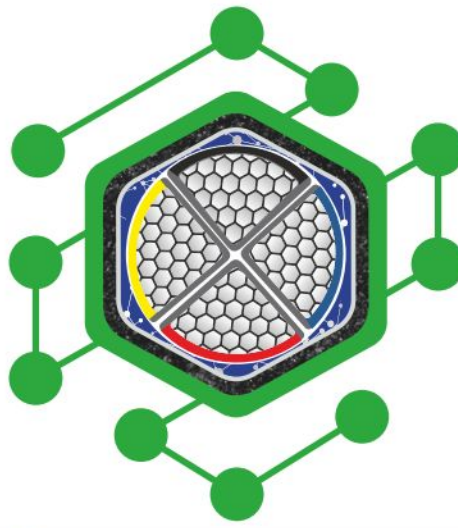

## eB<sup>+</sup> POWER Cable

LT, (HEAVY DUTY) Armoured Cable With Aluminium Conductor ELECTRON BEAM CROSS LINKED XLPE INSULATED For Working voltage of 1.1 kV Confirming to IS - 7098 (part -1 )

| Armoured Power Cables |                   |                   |                     |                   |                | Unarmoured Power Cables |                   |                   |                     |                   |
|-----------------------|-------------------|-------------------|---------------------|-------------------|----------------|-------------------------|-------------------|-------------------|---------------------|-------------------|
| 1 CORE<br>₹ / Mtr     | 2 CORE<br>₹ / Mtr | 3 CORE<br>₹ / Mtr | 3.5 CORE<br>₹ / Mtr | 4 CORE<br>₹ / Mtr | Size Sq.<br>mm | 1 CORE<br>₹ / Mtr       | 2 CORE<br>₹ / Mtr | 3 CORE<br>₹ / Mtr | 3.5 CORE<br>₹ / Mtr | 4 CORE<br>₹ / Mtr |
| -                     | 267               | 314               | -                   | 348               | 4              | -                       | 148               | 198               | -                   | 238               |
| -                     | 335               | 390               | -                   | 437               | 6              | -                       | 214               | 268               | -                   | 304               |
| -                     | 386               | 461               | -                   | 604               | 10             | -                       | 292               | 350               | -                   | 422               |
| 268                   | 449               | 513               | -                   | 654               | 16             | 152                     | 302               | 406               | -                   | 545               |
| 334                   | 462               | 615               | 722                 | 776               | 25             | 182                     | 377               | 536               | 688                 | 728               |
| 416                   | 592               | 842               | 933                 | 1061              | 35             | 236                     | 507               | 765               | 827                 | 915               |
| 530                   | 799               | 1090              | 1243                | 1400              | 50             | 322                     | 665               | 937               | 1101                | 1208              |
| 673                   | 1019              | 1463              | 1694                | 1899              | 70             | 438                     | 909               | 1323              | 1520                | 1731              |
| 801                   | 1284              | 1833              | 2090                | 2438              | 95             | 557                     | 1149              | 1717              | 1960                | 2260              |
| 960                   | 1581              | 2243              | 2620                | 2984              | 120            | 693                     | 1430              | 2140              | 2483                | 2854              |
| 1142                  | 1935              | 2779              | 3055                | 3605              | 150            | 869                     | 1790              | 2691              | 3004                | 3552              |
| 1387                  | 2363              | 3437              | 3865                | 4542              | 185            | 1065                    | 2182              | 3284              | 3756                | 4371              |
| 1723                  | 2989              | 4448              | 4927                | 5873              | 240            | 1354                    | 2788              | 4224              | 4789                | 5594              |
| 2094                  | 3677              | 5500              | 6111                | 7260              | 300            | 1680                    | 3450              | 5228              | 5942                | 6964              |
| 2704                  | 4819              | 6980              | 7754                | 9334              | 400            | 2224                    | 4553              | 6887              | 7599                | 9176              |



# eBEAM DC SOLAR CABLE



Improved Oil, Chemical & Crack Resistance

Improved Mechanical Properties Of The Cables In Elevated Temperature Conditions



Halogen Free, Flame Retardant, Fire Retardant, Low Smoke Emission

Max. Temp. at Conductor : 150°C (20,000h)



Short Circuit Temp : 325°C.

Flexibility & Stripability: For Fast & Easy Installation



# ELECTRON BEAM CROSS LINKED DC SOLAR CABLE

Single Core Sheathed Flexible Tinned Copper Conductor EBXL HFFR Insulated Cable.

As Per IS 17293 : 2020

| Nominal area<br>of conductor<br>sq mm | Basic Code          | Price<br>₹ Per 100 mtrs. | Price<br>₹ Per mtrs. |
|---------------------------------------|---------------------|--------------------------|----------------------|
| 2.50 sq mm                            | EBSC250<br>(100 M)  | ₹ 9,705                  | ₹ 97.05              |
| 4.00 sq mm                            | EBSC400<br>(100 M)  | ₹ 14,195                 | ₹ 141.95             |
| 6.00 sq mm                            | EBSC600<br>(100 M)  | ₹ 20,960                 | ₹ 209.60             |
| 10.00 sq mm                           | EBSC1000<br>(100 M) | ₹ 37,250                 | ₹ 372.50             |
| 16.00 sq mm                           | EBSC1600<br>(100 M) | ₹ 59,730                 | ₹ 597.30             |
| 25.00 sq mm                           | EBSC2500<br>(100 M) | ₹ 93,370                 | ₹ 933.70             |

## Terms & Conditions:

- Prices are in Indian ₹.
- Prices are subject to change without notice.
- This List Price supercedes all our previous Price Lists.
- Payments are only accepted by electronic Transfer / Cheque / DD.
- GST and any other tax will be charged extra as actual. Freight as per policy.
- Please refer to our Marketing Department for wire & cables, not covered in Price list.
- All disputes shall be governed under Arbitration and Conciliation Act subject to jurisdiction of Haridwar courts only.
- Company reserves the right to issue amendments, which may arise due to any errors in the list price. Actual products may vary in colour, design, description and colour combination etc.

# Flexi-TUF Submersible Cable



## Flexi-TUF Aluminium Submersible Cable

### Product Construction:

**Conductor:** High-performance Flexible Aluminium Conductor

**Insulation:** eBeam Cross-Linked Polyolefin

**Sheath:** Robust Thermoplastic Sheath

### Technical Data:

**Operating Temperature:** 125°C

**Short Circuite Temperature:** 250°C

**Bending Radius (min):** 4 X Overall Diameter

**Voltage Grade:** Up to and Including 1100 V

**Test Voltage:** 3.0 kV for 5 Minutes

## Flexi-TUF Copper Submersible Cable

### Product Construction:

**Conductor:** Electrolytic Grade Annealed Plain Copper

**Insulation:** eBeam Cross-Linked Polyolefin

**Sheath:** Robust Thermoplastic Sheath

### Technical Data:

**Operating Temperature:** 125°C

**Short Circuite Temperature:** 250°C

**Bending Radius (min):** 4 X Overall Diameter

**Voltage Grade:** Up to and Including 1100 V

**Test Voltage:** 3.0 kV for 5 Minutes



# BUILT TO OUTLAST EVERY DEPTH

## Unique Features



### 2X Longer Life

Engineered with e-Beam technology for unmatched durability.

### Superior Overload Bearing Capacity

Designed to handle extreme electrical loads with ease.



### Current Carrying Capacity

80% Higher Current Carrying Capacity (for Copper Type)

40% Higher Current Carrying Capacity (for Aluminum Type)

### Abrasion-Resistant Armor

damage is nearly impossible, ensuring long-term reliability.



### Negligible Cable Faults

High melting point insulation eliminates risk of failure.



# FLEXI-TUF SUBMERSIBLE CABLE PRICE

## COPPER SUBMERCIBLE CABLE

| Nominal area of conductor sq. mm | Basic Code           | eBeam Flexi Tuf CU List Price in Per Mtr |
|----------------------------------|----------------------|------------------------------------------|
| 1.00 SQ MM                       | eBSUBCU3X1.0P (500M) | ₹ 114.80                                 |
| 1.50 SQ MM                       | eBSUBCU3X1.5P (500M) | ₹ 155.80                                 |
| 2.50 SQ MM                       | eBSUBCU3X2.5P (500M) | ₹ 251.12                                 |
| 4.00 SQ MM                       | eBSUBCU3X4.0P (500M) | ₹ 373.1                                  |
| 6.00 SQ MM                       | eBSUBCU3X6.0P (500M) | ₹ 536.07                                 |
| 10.00 SQ MM                      | eBSUBCU3X10P (500M)  | ₹ 849.21                                 |

## ALUMINIUM SUBMERCIBLE CABLE

| Nominal area of conductor sq. mm | Basic Code           | eBeam Flexi Tuf CU List Price in Per Mtr |
|----------------------------------|----------------------|------------------------------------------|
| 1.00 SQ MM                       | eBSUBAL3X1.0P (500M) | -                                        |
| 1.50 SQ MM                       | eBSUBAL3X1.5P (500M) | ₹ 68.5                                   |
| 2.50 SQ MM                       | eBSUBAL3X2.5P (500M) | ₹ 89                                     |
| 4.00 SQ MM                       | eBSUBAL3X4.0P (500M) | ₹ 127                                    |
| 6.00 SQ MM                       | eBSUBAL3X6.0P (500M) | ₹ 190                                    |
| 10.00 SQ MM                      | eBSUBAL3X10P (500M)  | ₹ 284.5                                  |



# Our Presence



## V-MARC India Ltd. Offices

### Head Office

Plot No.3, 4, 18 & 20A  
Sector-IIDC, SIDCUL  
Haridwar, Uttarakhand — 249403

### Noida

C-27, C Block, 3rd Floor  
Trapezoid IT Park, Phase 2, Sector-62  
Noida, Uttar Pradesh — 201309

### Mumbai

401 Acme Plaza, Opp. Sangam Theatre  
Andheri Kurla Road, Andheri (East)  
Mumbai+ Maharashtra - 400093

### Chennai

2/8 B, Anbu Valarmathi Nagar  
Vadaperumbakkam  
Chennai, Tamilnadu -600060

### Cochin

BS 8, Heavenly Plaza, Civil Lines Rd  
Vazhakkala, Cochin, Kerala-682030

## GET IN TOUCH

+91-7055521808

info@v-marc.in

www.v-marc.com